




Ag-FactorSeedDrill

Features

- High breakout of tynes
- Lightweight & strong
- Nylon distributors
- Seed & fertilizer or Seed only option
- Strong Frame

Available in

Three point linkage	Trailing
10 tyne	15 tyne
13 tyne	17 tyne
15 tyne	
17 tyne	

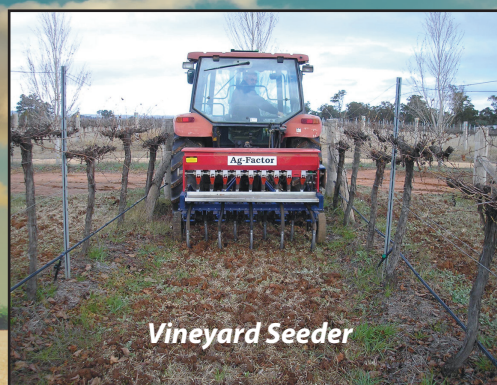

**NOW BUILDING
17 ROW SEEDER**

Optional Equipment

Disc Coulters

A Variety of Different Harrows

6" - 9" Row Spacing

A Variety of Points

CONTACT

M T CROWE,


Phone: 0427 649 827

Email: crowesag@bigpond.com

web: www.agfactorseeder.com.au

GETTHEAG-FACTORWORKINGFORYOU

TECHNICAL SPEC SHEET

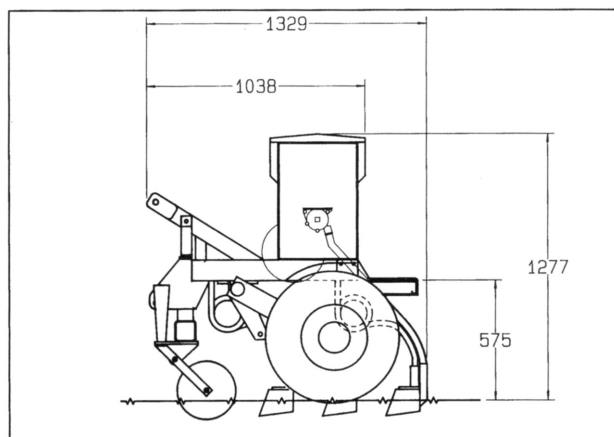

SPECIFICATIONS

Model		1011	1013	1015	1017
No. of Rows		10	13	15	17
Hopper Capacity					
Seed (Wheat)	kg	200	225	350	380
Overall Width	m	2.2	2.5	2.8	3.1
Ranks of Tyres		2			
Row Spacing		175mm (7")			
Tyne Type		25mm (1") Square Coil Tyne			
Points		Super Seeder or Lucerne Point			
Coulters		330mm (13") Diameter			
Linkage Attachment		Category 1 or Category 2			
Seed Metering		Internally fluted roller infinitely variable			
Wheels		13" Ford stud pattern			
Drive		Ground wheel & chain			

FEATURES

- A lightweight but high strength angle & RHS (75mm x 75mm) basic drill frame minimises loading of tractor linkage mechanisms.
- Overall machine width and transport width is narrow by comparison with the sowing width of each size drill.
- All Coulters are mounted on a single frame which can be removed quickly.
- High breakout pressure on tynes ensures even sowing depth and direct drill capability.

GET THE AG±FACTOR WORKING FOR YOU